




RESPONSE MONOBLOC FILLER

Response Monobloc Filler

Adelphi's Response Monobloc Filler provides many advantages for customers compared with traditional inline packaging systems.

Key features and benefits:

- Capable of filling 5ml to 250ml containers
- Space-saving design
- Ten-minute strip down time
- Hygienic stainless steel construction; all wetted parts are 316 stainless steel
- Response volumetric filler fill-accuracy +/- 0.25%
- Quick and easy to change parts from one fill-size container to another
- Easy-to-use intuitive HMI touch screen controls for your operator
- Designed to effectively handle liquids, oils, creams, pastes and solids in suspension
- Speed of operation in the region of 35 per minute
- Reduced labour costs

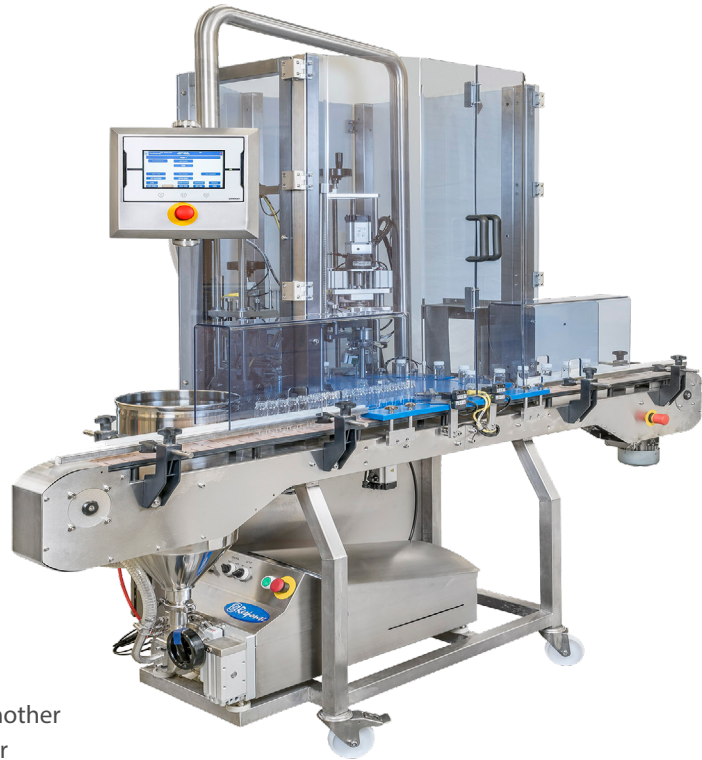

The Response Monobloc Filler can incorporate the following elements to give a complete turnkey packaging line:

- In-feed table
- Bottle blower
- Filler
- Automatic cap placement
- Capper
- Labeller

	Specification
Accuracy	±0.25%
Output (per minute)	30 - 35
Height without hopper / tank	2032 mm
Depth	810 mm
Width without conveyor	1120 mm
Weight (approx)	275 kg (plus Response base unit and hopper)
Air consumption per cycle	7.5 litres at 6 bar
Volume range	5 ml – 250ml
Electrical consumption	Single phase 240VAC, 13A supply

The Response Monobloc Filler has been designed to work with our Adelphi Response Volumetric Filler, but it can also be configured to incorporate fillers from other suppliers.

Suitable container dimensions:

External diameter up to 85mm

Height up to 250mm

Cap diameter up to 45mm